




INDUSTRIAL HIGH-TEMP THERMAL CAMERA

FLIR TG297™

The FLIR TG297 combines accurate measurement with the ability to image temperatures as high as 1030°C (1886°F) in a one-of-a-kind diagnostic tool. Now you can both see and measure the source of common issues involving electrical and mechanical systems, diagnose breakdowns, and verify manufacturing processes. Examine anything from a furnace to a forge using thermal enhanced with FLIR MSX® (Multi-Spectral Dynamic Imaging), which improves image clarity by embossing visual scene details onto full thermal images. This can provide the perspective and context you need to accurately target potential faults, troubleshoot repairs, and monitor processes. Record images to assure team members that machinery and systems are functioning safely and at peak efficiency. With a simple user interface, Bluetooth® connectivity, storage for up to 50,000 images, and rechargeable Li-ion battery, the FLIR TG297 is ready to go out of the box.

www.flir.com/TG297

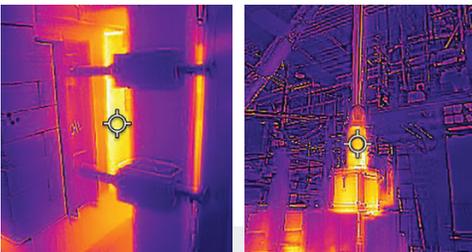

IDENTIFY PROBLEMS QUICKLY

Outfit your toolbox with this combination non-contact temperature measurement and thermal imaging camera

- Experience the difference you can make with a true 160 × 120 IR pixel imager (19,200 pixels)
- High-temperature filter allows camera to measure and image temperatures up to 1030°C (1886°F)
- Work from a safe distance while scanning high-temperature objects thanks to the 30:1 spot ratio
- Identify the exact area that you're measuring using the bullseye laser pointer

PRODUCE CRISP IMAGES FOR EASY INTERPRETATION

See the detail needed to troubleshoot faults and gauge their severity

- Diagnose problems faster with FLIR-patented MSX image enhancement
- Display and capture thermal or visual images with temperature readings
- Compare before-and-after stored images to demonstrate the problem and the repair
- View thermal images in your preferred color palette on the bright 2.4-inch color display

WORK WITH CONFIDENCE IN RUGGED ENVIRONMENTS

Take the TG297 anywhere thanks to its portable design and protective IP54 enclosure

- Work safely and worry-free knowing that the thermal imager can withstand a 2-meter drop
- Peer into the darkness and hard-to-reach areas with the bright LED flashlight
- Find this compact, durable imager in a crowded tool bag easily, thanks to the ergonomic handle design
- Rely on the security of the world-class FLIR 2-10 warranty

SPECIFICATIONS

Imaging and optical data

| | |
|----------------------------------|-----------------------------------|
| IR resolution | 160 × 120 pixels |
| Digital image enhancement | Yes |
| Thermal sensitivity/NETD | <70 mK |
| Field of view (FOV) | 57° × 44° |
| Minimum focus distance | 0.3 m (0.98 ft) |
| Distance to spot ratio | 30:1 |
| Image frequency | 8.7 Hz |
| Focus | Fixed |
| Focal plane array/spectral range | Uncooled microbolometer/7.5–14 μm |
| Detector pitch | 12 μm |

Image presentation

| | |
|--------------------|--|
| Display resolution | 320 × 240 pixels |
| Screen size | 2.4 in. portrait |
| Color palettes | Iron , Rainbow, White hot, Black hot, Arctic, Lava |
| Image adjustment | Automatic |
| Image modes | MSX® (Multi Spectral Dynamic Imaging) Visual with temperature reading |
| Gallery | Yes |

Measurement and analysis

| | |
|------------------------------|---|
| Object temperature range | -25°C to 1030°C (-13°F to 1886°F) |
| Measurement accuracy | -25°C to 50°C (-13°F to 122°F): up to ±3°C (±7°F) 50 to 100°C (122 to 212°F): ±1.5°C (±3°F) or ±1.5%, whichever is greater 100°C to 500°C (212°F to 932°F): ±2.5°C (±6°F) or ± 2.5% whichever is greater 500°C to 1030°C (932°F to 1886°F): ±3°C (±7°F) or ± 3%, whichever is greater |
| IR temperature resolution | 0.1°C (0.2°F) |
| Repeatability of reading | ±1% of reading or ±1°C (2°F), whichever is greater |
| Response time | 150 ms |
| IR thermometer measurement | Continuous scanning |
| Minimum measurement distance | 0.26 m (0.85 ft) |
| Spotmeter | Center spot on/off |

Set-up and service functions

| | |
|-----------------------|---|
| Set-up commands | Local adaptation of units, language, date, and time formats Screen brightness (high, medium, low) Gallery, deletion of images |
| Emissivity correction | Yes: 4 pre-set levels with custom adjustment of 0.1–0.99 |

Image storage and visual camera

| | |
|-------------------------------|------------------------------|
| Storage capacity on 4 GB card | 50,000 images |
| Image file format | JPEG w/ spot temp data |
| Digital camera resolution | 2 MP (1600 × 1200 pixels) |
| Field of view (FOV) | 71° × 56°, adapts to IR lens |

Light and laser

| | |
|---------------|--|
| Flashlight | 100 lumens LED, on/off option |
| Class 1 laser | Projects center spot and outlines circular measurement area to indicate size |

Data communication interfaces

| | |
|------------|------------------------------|
| Bluetooth® | BLE |
| USB | Type-C: data transfer, power |

Additional data

| | |
|------------------------|--|
| Battery type | Rechargeable 3.7 V Li-ion battery |
| Battery operating time | 5 hrs scanning |
| Battery charging time | 4 hrs to 90% |
| Power management | Adjustable: off, 5 min, 15 min, 30 min |
| Shock/vibration | 25 g (IEC 60068-2-27); 2 g (IEC 60068-2-6) |
| Drop | Designed for 2 m (6.56 ft) |
| Weight | 0.394 kg (13.9 oz) |
| Size (L × W × H) | 210 × 64 × 81 mm (8.3 × 2.5 × 3.2 in) |

Package contents

Camera, wrist strap lanyard, USB cable, pouch, printed documentation

Specifications are subject to change without notice. For the most up-to-date specs, go to www.flir.com

CORPORATE HEADQUARTERS

FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.477.3687

NASHUA

FLIR Systems, Inc.
9 Townsend West
Nashua, NH 03063
USA
PH: +1 866.477.3687

LATIN AMERICA

FLIR Systems Brasil
Av. Antonio Bardella, 320
Sorocaba, SP 18085-852
Brasil
PH: +55 15 3238 8070

CANADA

FLIR Systems, Ltd.
3430 South Service Road, Suite 103
Burlington, ON L7N 3J5
Canada
PH: +1 800.613.0507

www.flir.com
NASDAQ: FLIR

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2019 FLIR Systems, Inc. All rights reserved. 08/19/19

19-1426-INS-TG297



The World's Sixth Sense®